





Butterfly Check Valve - Double

5/110-F14

Eccentric face to face EN558-1 row 14

PN 1-40

Design	According to DIN3354 / EN593 welded body
Face to face	EN558-1, row 14
Flanges	DIN2501 / EN1092-1
Facing	DIN2526-C / EN1092-1-B

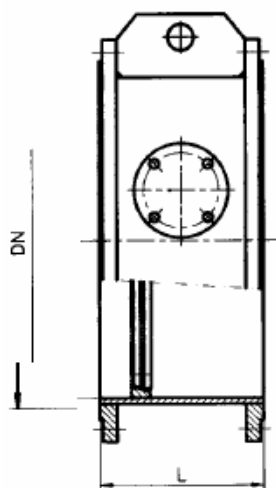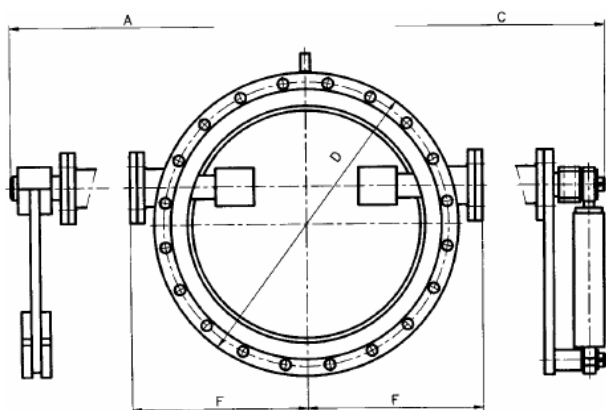



Butterfly Check Valve - Double

5/110-F14

Eccentric face to face EN558-1 row 14

PN 1-40

Dimensions ¹

DN	L	PN 16				PN 25				PN 40			
		F	D	-	[kg] ³	F	D	-	[kg] ³	F	D	-	[kg] ³
80	180	165	200	-		165	200	-		175	200	-	
100	190	175	220	-		190	235	-		200	235	-	
125	200	190	250	-		210	270	-		215	270	-	
150	210	215	285	-		230	300	-		240	300	-	
200	230	245	340	-		260	360	-		275	375	-	
250	250	275	405	-		300	425	-		320	450	-	
300	270	310	460	-		330	485	-		355	515	-	
350	290	340	520	-		375	555	-		385	580	-	
400	310	370	580	-		405	620	-		425	660	-	
450	330	400	640	-		x	x	-		445	685	-	
500	350	445	715	-		460	730	-		x	755	-	
600	390	510	840	-		525	845	-		x	890	-	
700	430	545	910	-		595	960	-		x	995	-	
800	470	610	1025	-		655	1085	-		x	1140	-	
900	510	660	1125	-		715	1185	-		x	1250	-	
1000	550	725	1255	-		780	1320	-		x	1360	-	
1100	590 ²	x	x	-		x	x	-		x	x	-	
1200	630	850	1485	-		895	1530	-		x	1575	-	

1) Dimension A, C at request

2) Acc. to manufacturers standard

-) Larger DN on request

x) At request

Type 5/120-S14

- lever, counter-weight and hydr. Damper





Butterfly Check Valve - Double

Eccentric face to face EN558-1 row 14

5/110-F14

PN 1-40

Design	According to DIN3354 / EN593 welded body
Face to face	EN558-1, row 14
Flanges	DIN2501 / EN1092-1
Facing	DIN2526-C, EN1092-1-B

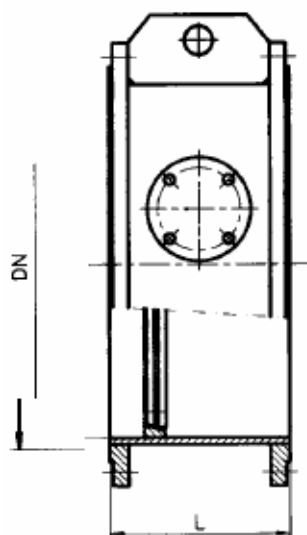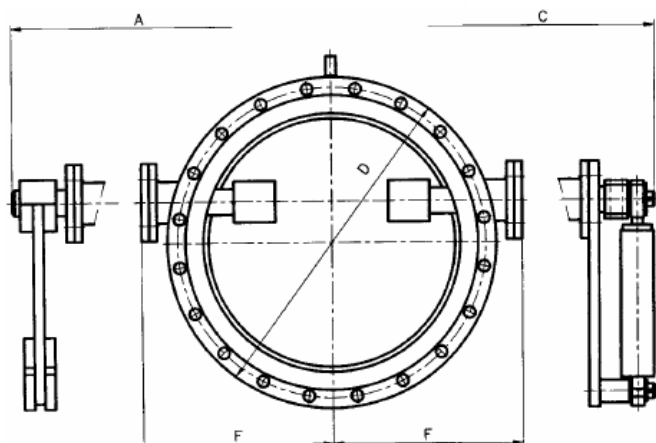



Butterfly Check Valve - Double

5/110-F14

Eccentric face to face EN558-1 row 14

PN 1-40

Dimensions ¹

DN	L	PN 16				PN 25				PN 40			
		F	D	-	[kg]	F	D	-	[kg]	F	D	-	[kg]
80	180	165	200	-		165	200	-		175	200	-	
100	190	175	220	-		190	235	-		200	235	-	
125	200	190	250	-		210	270	-		215	270	-	
150	210	215	285	-		230	300	-		240	300	-	
200	230	245	340	-		260	360	-		275	375	-	
250	250	275	405	-		300	425	-		320	450	-	
300	270	310	460	-		330	485	-		355	515	-	
350	290	340	520	-		375	555	-		385	580	-	
400	310	370	580	-		405	620	-		425	660	-	
450	330	400	640	-		x	x	-		455	685	-	
500	350	445	715	-		460	730	-		x	755	-	
600	390	510	840	-		525	845	-		x	890	-	
700	430	545	910	-		295	960	-		x	995	-	
800	470	610	1025	-		655	1085	-		x	1140	-	
900	510	660	1125	-		715	1185	-		x	1250	-	
1000	550	725	1255	-		780	1320	-		x	1360	-	
1100	590 ²	x	x	-		x	x	-		x	x	-	
1200	630	850	1485	-		895	1530	-		x	1575	-	

1) Dimension A, C at request

2) Acc. to manufacturers standard

-) Larger DN on request

x) At request

Type 5/120-S14

- Lever, counter-weight and hydr. Damper