



High Pressure stop or control valve

in Z - form


1/062

PN 400

Design and application:

Stop resp. control valve with packing box suitable for high temperature and high pressure service.

Maintenance and repairs can be carried out easily - in case of damage the seat can be replaced by disassembling the upper body. It is not necessary to take apart the pipeline.

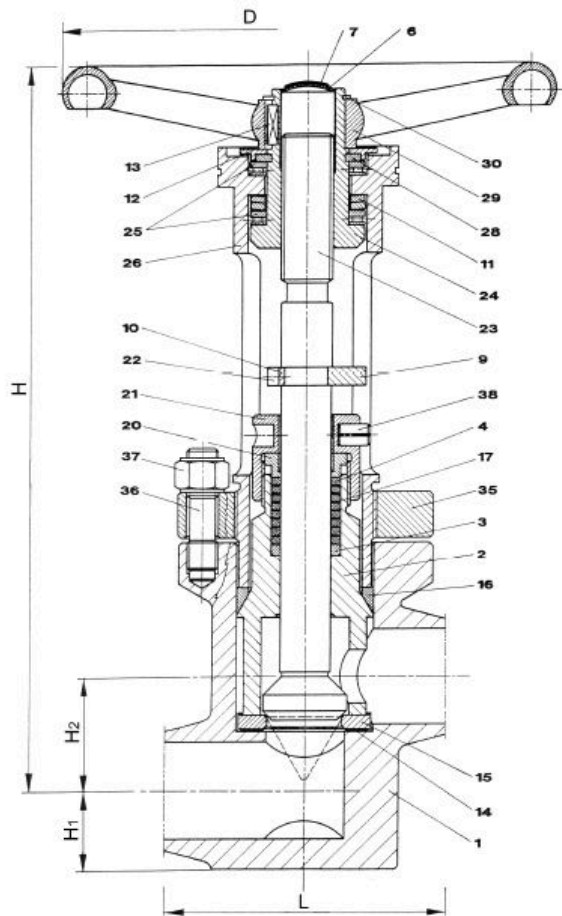

end connections see technical appendix

parts list

Pos.	designation
1	body
2	sealing support
4	packing
14	sealing ring
15	seat
16	sealing
17	support
21	packing box lid
23	stem
24	stem nut
26	bow
29	handlever or handwheel



High Pressure stop or control valve


in Z - form

1/062

PN 400

The valve can be manufactured also with electric gear.

L (mm) The building - in length is acc. to the adequate standards, depending on the finish of the chunk, the diameter nominal and the pressure nominal.

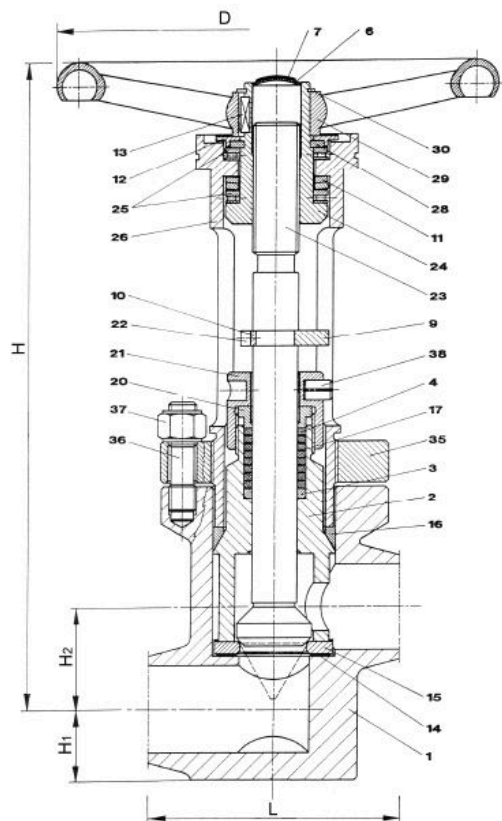

diameter nom DN (mm)	dimensions				discharge coefficient	
	H (mm)	H1 (mm)	H2 (mm)	D (mm)	Kvs (m3/h) shut off type	control type
50	485	50	70	250		
65	485	60	85	400		
80	620	70	105	500		
100				gear		
125				gear		
150	1250	110	200	gear		
200				gear		