



High pressure stop or control valve

straight way type


1/064

PN 630

Design and application:

Stop resp. control valve with packing box suitable for high temperature and high pressure service.

Maintenance and repairs can be carried out easily - in case of damage the seat can be replaced by disassembling the upper body. It is not necessary to take apart the pipeline.

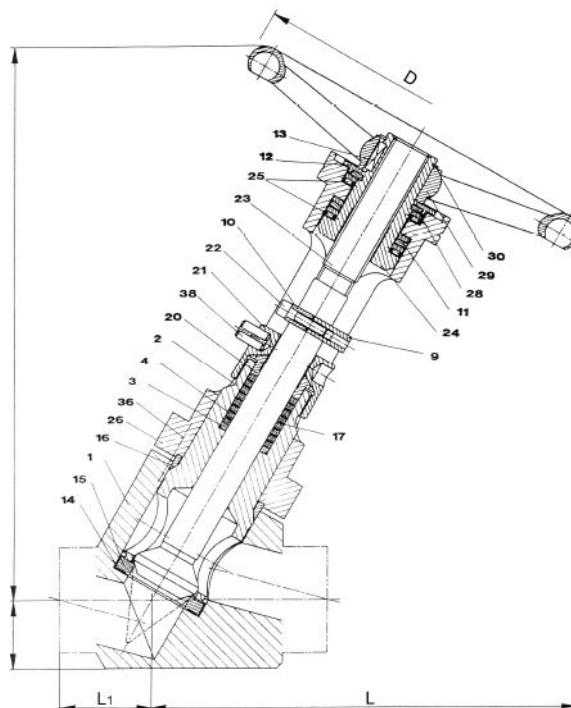

Parts list

Pos.	designation
1	body
2	sealing support
4	packing
14	sealing ring
15	seat
16	sealing
17	support
21	packing box lid
23	stem
24	stem nut
26	pipe - body
29	handlever or handwheel



High pressure stop or control valve


straight way type

1/064

PN 630

The valve can be manufactured also with electric gear.

L (mm) The building - in length is acc. to the adequate standards, depending on the finish of the chunk, the diameter nominal and the pressure nominal.

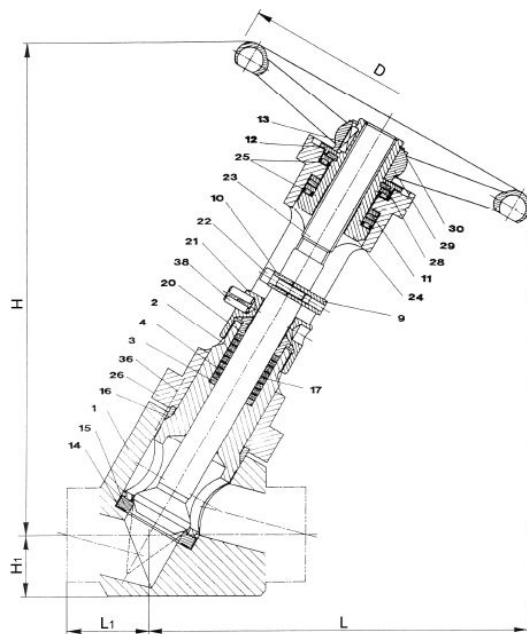

diameter nom. DN (mm)	dimensions				discharge coefficient	
	H	H1	L	D	Kvs (m3/h)	
	(mm)	(mm)	(mm)	(mm)	shutt off type	control type
10	110	20	115	60	1,6	1,50
15	160	30	175	130	4,2	4,05
20	210	35	220	230	6,1	5,90
25	210	35	220	230	9,6	9,30
32	330	40	345	350	14,4	14,00
40	330	45	345	350		
50	460	55	420	350		
65	470	55	440	400		
80		70		gear		
100		85		gear		
200				gear		