



High pressure checkvalve

stream lined flow, with or without closing spring

1/070


PN 630

Design and application:

Check valve without closing spring. The spring loaded type allows installation of any position. The valve is suitable to corrosive media. The flow bottom direction is indicated to be changed easily by disassembling the valve. The body seat is exchangeable.

Rating		
Working temp.	Material	
t (°C)	1.7380 pü (bar)	1.4541 pü (bar)
20	600	450
100	-	390
200	550	250
0	500	300
400	460	280
500	330	260
550	160	-

Dimensions											
DN	6	10	15	25	32	40	50	65	80	100	150
L (mm)	155	180	215	280	300	430	485	485	700	800	900

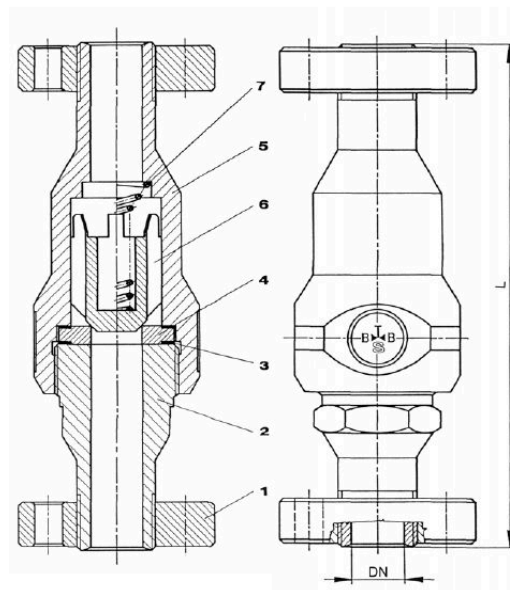

arts list	
Pos.	designation
1	Threaded flange
2	union
3	sealing
4	seat
5	body
6	check piston
7	spring