



High pressure checkvalve


straight way type, with or without closing spring

1/072


PN 630

Design and application:

Check valve without closing spring. The spring loadet type allows installation of any position. The valve ist suitable to corrosive media. The flow bottom direcion ins indicated to be changed easily by disassembling the valve. The body seat is exchangeable.

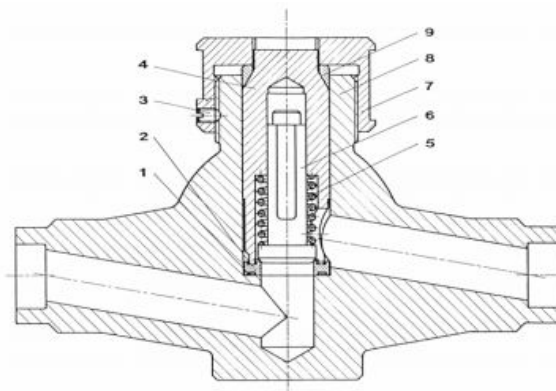

Parts list	
Pos.	designation
1	sealing
2	seat
3	threaded pin
4	seat holder
5	spring
6	stem
7	threaded bush
8	body
9	sealing ring

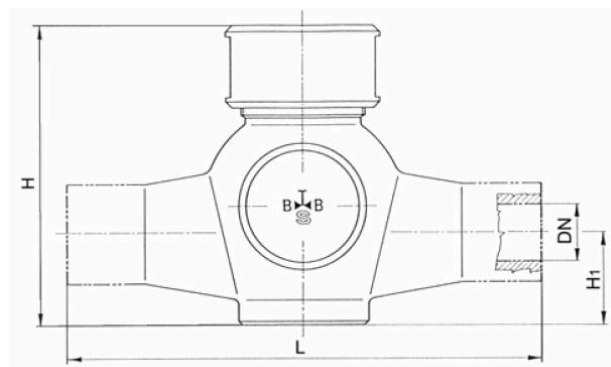

Dimensions				
DN	H	H1	L	Kvs
(mm)	(mm)	(mm)	(mm)	(m3/h)
6	15	40	70	0,45
8	20	65	110	0,90
10	20	65	110	1,42
16	35	115	150	3,70
24	42	145	230	8,48
30	60	200	270	12,60
45	85	250	300	15,50
50	85	250	300	15,80