



Three-way globe valve

On-Off function

8/917



PN 16 - 40

Design and application:

On-off globe valve / Three-Way globe valve with casted body suitable for manual or electrical actuator.

Installation:

- Baulängen nach EN558-1
- Flansch nach EN1092-1
- Schweißenden auf Anfrage

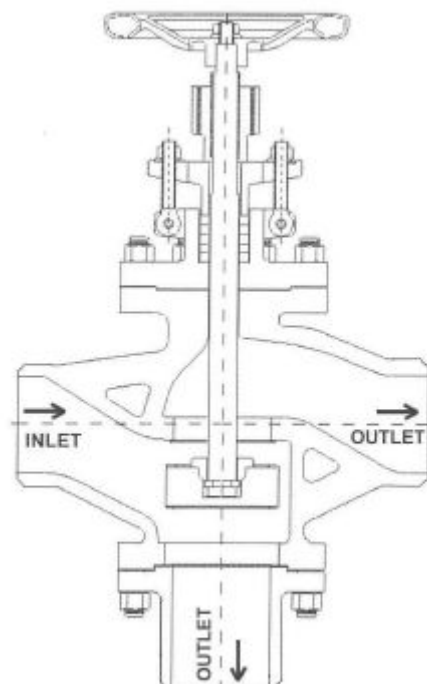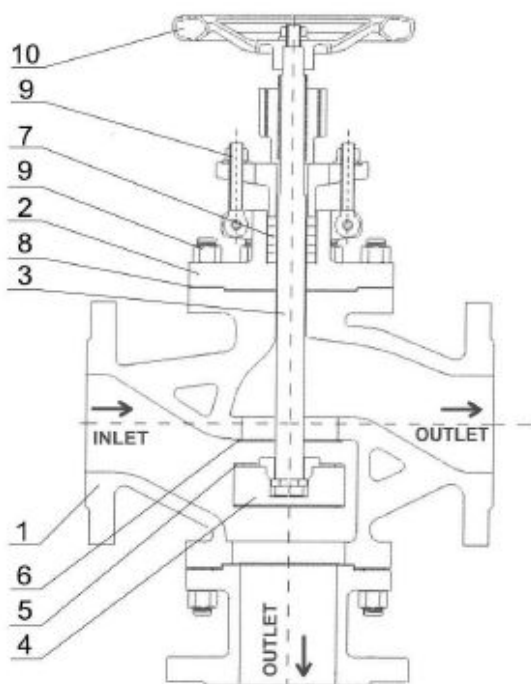

Materials

Pos.	Designation	Options		
		Set 1 Cast Iron	Set 2 Cast Steel	Set 3 St. St.
1	Body	GG25	1.0619	CF8M
2	Bonnet	GG25	1.0619	CF8M
3	Stem	SS 410	SS 410	SS 316
4	Disc	A 105*	Steel A105*	SS 316
5	Disc-Seat	SS 304	SS 304	SS 316
6	Body-Seat	SS 304	SS 304	CF8M
7	Stem-Packing	Graphite	Graphite	Graphite
8	Gasket	Asbestos free	Graphite + St. St.	Graphite + St. St.
9	Bolt, Nuts	6S	B7 / 2H	A2
10	Handwheel		Pressed-Steel	

*DN 25 = Disc fully made of stainless steel 410. / ** optional: stellite is available

Three-way globe valve


On-Off function

8/917

PN 16 - 40

Special designs:

- stainless steel type made of 1.4408 or 1.4581
- seat plated of 1.4301 or stellite

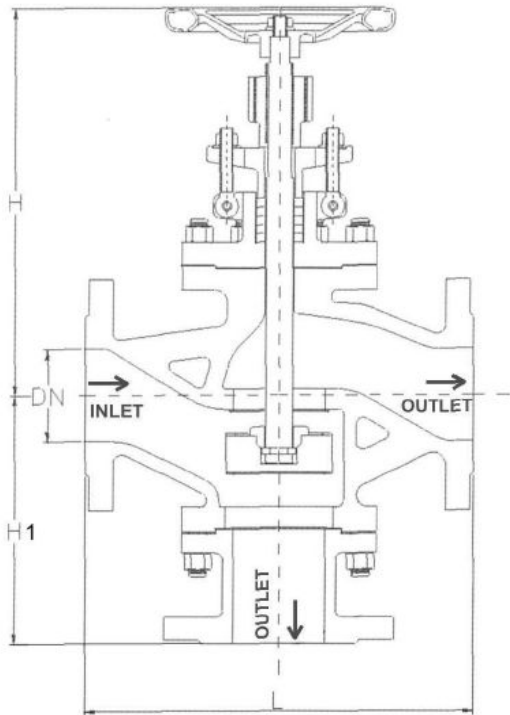

Dimensions														
DN	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L	160	180	200	230	290	310	350	400	480	600	730	850	980	1100
H	235	240	280	280	300	350	400	400	480	600	-	-	-	-
H1	140	140	165	165	180	195	225	260	300	350	440	-	-	-
Weight [kg]	12	14	20	22	33	45	65	80	110	210	320	-	-	-