



Bellow globe valve

Y-pattern, turning rising stem

8/150

PN 40

- Design:
 - Stop valve bellow - sealed
 - Y-pattern.
- Application:
 - Liquid and gaseous media
 - Max. working temperature 300°C
 - Higher temperatures at request
- Connection:
 - Welding ends DIN3239 / EN12627
 - Flanged ends DIN2501 / EN1092-1



Dimensions

Type 8/1850/SE

DN	L	H1	H2	DH	Weight [kg]
15	130	210	225	100	4,2
20	150	210	225	100	4,5
25	160	210	225	125	5,0
32	180	210	225	125	6,0
40	200	-	-	150	8,8
50	230	-	-	175	11,0

Type 8/150

DN	L	D	b	DH	Weight [kg]
15	130	95	16	100	4,9
20	150	105	18	100	5,7
25	160	115	18	125	6,8
32	180	140	18	125	9,5
40	200	150	18	150	14,0
50	230	165	20	175	18,0
65	290	185	22	200	27,0
80	310	200	24	225	33,0
100	350	235	24	250	48,0
125	400	270	26	300	63,0
150	480	300	28	350	91,0
200	600	375	34	500	160,0
250	730	450	38	600	360,0
300	850	515	42	700	480,0
350	980	580	46	750	-
400	1100	660	50	750	-

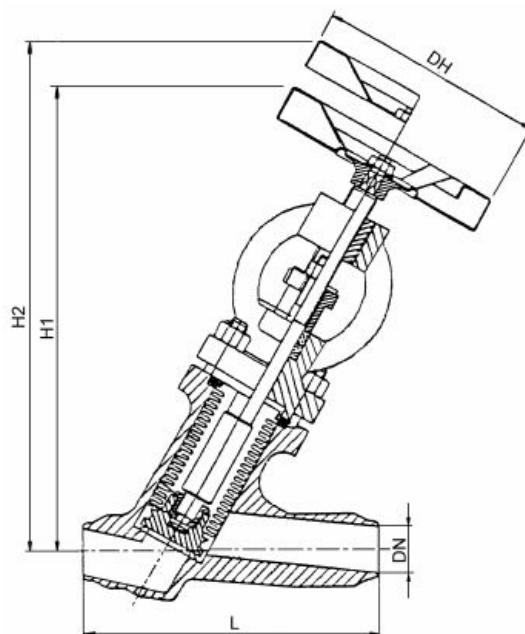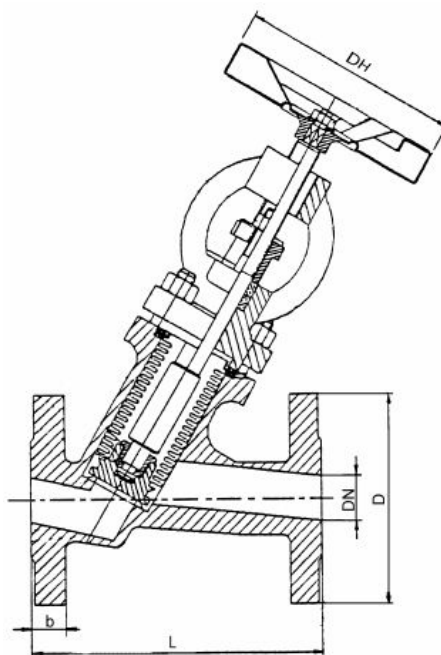




Bellow globe valve

Y-pattern, turning rising stem

8/150

PN 40

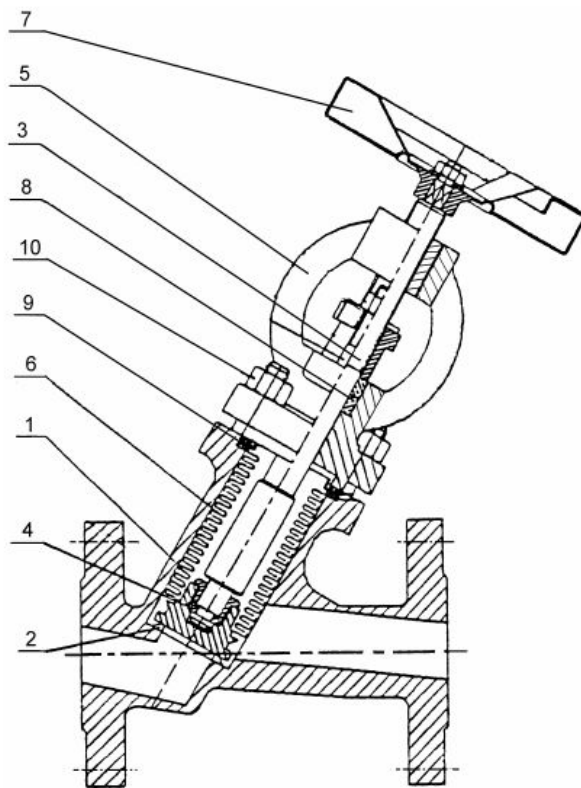

8 - Globe Valve

8 - Globe Valve

Materials				
Pos.	Designation	Options		
1	Body	A105 ^{*)} / GS-C 25 (WCB)	F11 (WC6)	CF8M
2	Seat	AISI 308L Si	AISI 316L	AISI 316
3	Stem	AISI 410	AISI 410	AISI 316
4	Disc	AISI 410	AISI 410	AISI 316
5	Yoke	A105 ^{*)} / GS-C 25 (WCB)	F11 (WC6)	CF8M
6	Bellow	AISI 321	AISI 321	AISI 321
7	Handwheel	Steel	Steel	Steel
8	Packing	Graphite	Graphite	Graphite
9	Sealing	Graphite	Graphite	Graphite
10	Screws	5.8	1.72	A4-70

^{*)} Type 8/150 for DN≤50

^{*)} Type 8/150/SE for DN≤32

Other materials at request