




Stop and check valve

Stream lined flow, threaded connection

8/201

PN 16

- Design:
 - Stop and check valve, casted body, with threaded connection
- Application:
 - Industrial cold and hot water, steam, air, neutral fluids
 - Max. working temperature 200°C
- Connection:
 - Female thread acc. DIN 2999

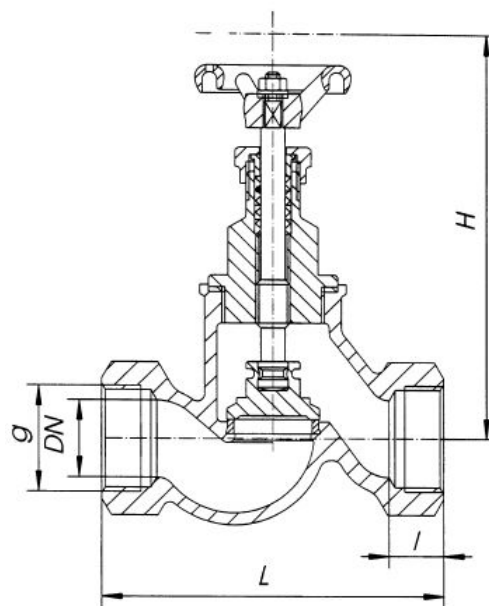

Type 8/201


Dimensions					
DN	g	l	H	L	Weight [kg]
10	R 3/8"	12	112	85	0,7
15	R 1/2"	14	118	90	0,9
20	R 3/4"	16	118	100	1,0
25	R 1"	18	138	120	1,5
32	R 1 1/4"	20	165	140	2,1
40	R 1 1/2"	22	185	170	3,2
50	R 2"	24	198	200	4,3

Stop and check valve


Stream lined flow, threaded connection

8/201


PN 16

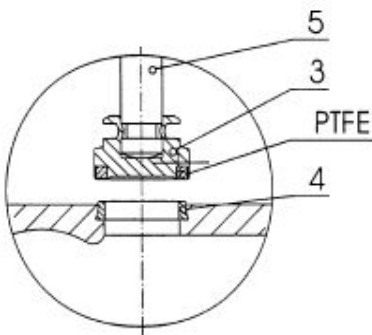

Cone with PTFE ring

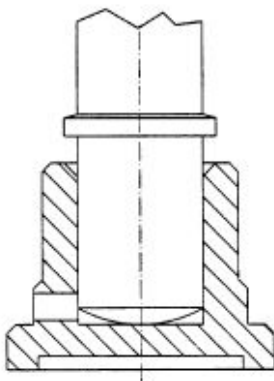

Without closing spring

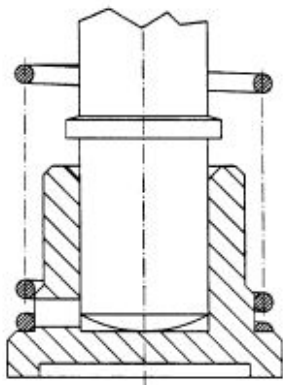

with closing spring

Screw-down check valve type 8/201/RV

Materials			
Designation	Set 1	Set 2	Set 3
Body	GG 25 (0.6025)	GG 25 (0.6025)	GS-C25 (1.0619)
Seat	X10Cr13 (1.4006)	G-CuSn10	X10Cr13 (1.4006)
Bonnet	GG 25 (0.6025)	GG 25 (0.6025)	GS-C25 (1.0619)
Stem	X20Cr13 (1.4021)	CuZn40Mn2	X10Cr13 (1.4006)
Plug	X20Cr13 (1.4021)	CuSn10	X10Cr13 (1.4006)
Packing	Graphite	Graphite	Graphite
Sealing	Graphite	Graphite	Graphite

Special designs:

- Cone with PTFE ring for T<120°C
- Screw-down and check valve
- Suitable for sea water service