



High pressure globe valve

Stream lined flow

8/370


PN 250

Design and application:

On-Off globe valve with casted body and back sealing
Body seat facing stellited

Installation:

Overall lenght and flanges accord. DIN, flanges
accord. to other standards and welding by request

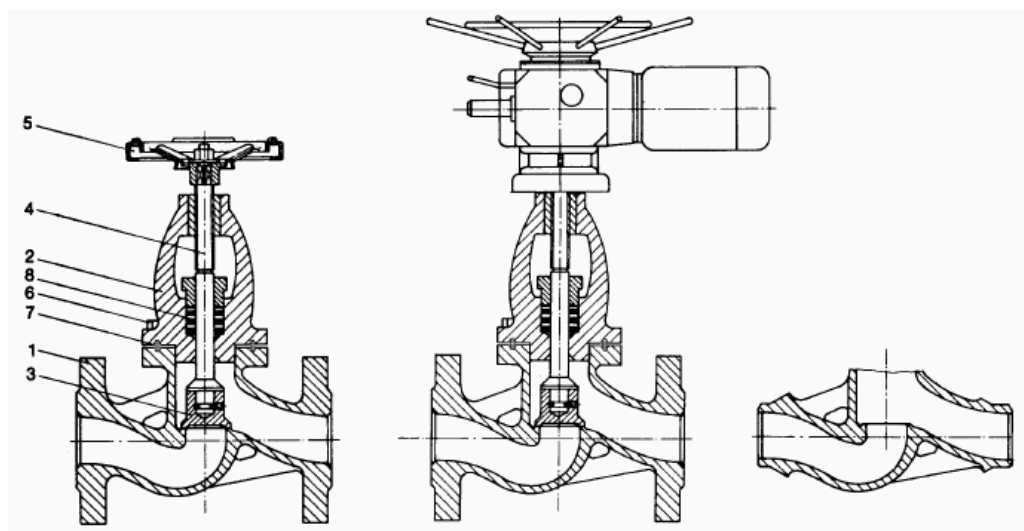

Materials			
Pos.	Designation	Standard design	High temp. serv.
1	Body	GS-C25 1.0619	1.7357
2	Bonnet	GS-C25 1.0619	1.7357
3	Disc	1.4021, A105	1.4021, A105
4	Stem	1.4021	1.4021
5	Handwheel	steel	steel
6	Screw	Ck35 1.1181	Ck35 1.1181
7	Sealing	Ring joint / NIROSS	
8	Packing	Graphite	

Special designs:

- Stainless steel type made of 1.4408 resp. CF8M
- With mounting flange for electrical actuator
- Alternative designs see next page




High pressure globe valve


Stream lined flow

8/370


PN 250




regulation disc




latern ring



opening indicator



balanced disc

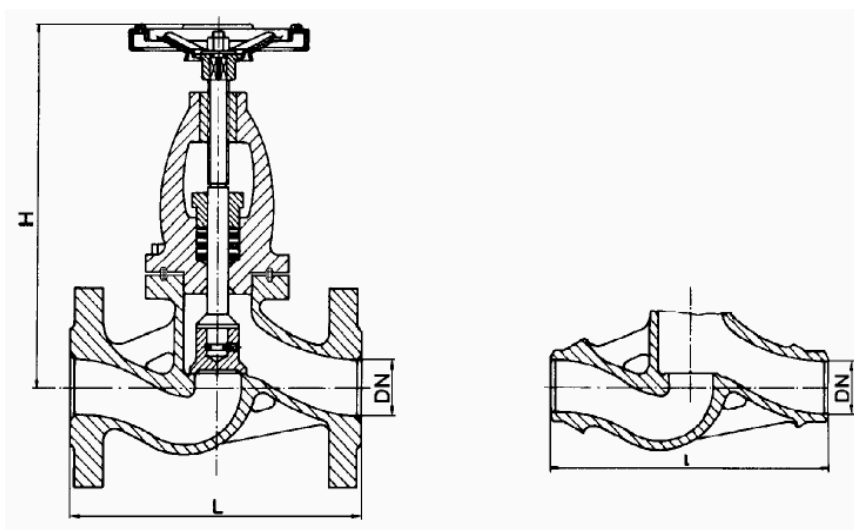

Dimensions

DN	L	H	[kg]
15	230	280	22
20	260	-	26
25	260	320	-
32	300	-	-
40	300	-	-
50	350	470	70
65	400	490	90
80	450	500	104
100	520	530	190
125	600	-	-
150	700	770	430