



Y-Type

Mud valve

8/830


PN 16 - 100

Construction features:

- robust coverage type
- minor flow resistance
- steady stem guide with back seat
- material variations acc. to service conditions
- simple maintenance
- interchangeability of wear parts

Connection:

- flanged ends acc. DIN EN558-1

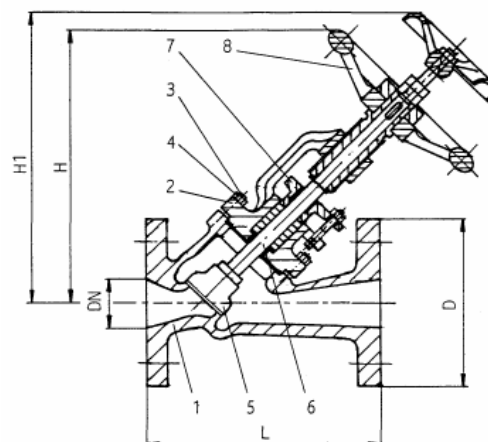

Materials		
Pos.	Designation	Material
1	Body	GS-C25 *
2	Bonnet	GS-C25
3	Bolt	5.6
4	Hex. Nut	6
5	Disc	1.4021
6	Stem	1.4021
7	Gland bushing	1.4021 / C22.8
8	Handwheel	GG / Steel

* other material combinations at request

Dimensions																
DN	PN 16				PN 25 / 40				PN 63				PN 100			
	L	D	H*	H' *	L	D	H*	H' *	L	D	H*	H' *	L	D	H*	H' *
12	130	95	180	200	130	95	180	200	210	105	280	310	210	105	280	310
20	150	105	200	225	150	105	200	225	230	130	320	355	230	130	320	355
25	160	115	220	245	160	115	220	245	230	140	320	355	230	140	320	355
32	180	140	240	270	180	140	240	270	260	155	360	405	260	155	360	405
40	200	150	270	310	200	150	270	310	260	170	360	405	260	170	360	405
50	230	165	300	340	230	165	300	340	300	180	420	470	300	195	420	470
65	290	185	340	390	290	185	340	390	340	205	500	560	340	220	500	560
80	310	200	380	435	310	200	380	435	380	215	580	660	380	230	580	660
100	350	220	430	485	350	235	430	485	430	250	660	745	430	265	660	745
125	400	250	520	575	400	270	520	575	500	295	710	810	500	315	710	810
150	480	285	600	680	480	300	600	680	550	345	780	880	550	355	780	880

* Valve open