




Control valve

1/126

No.	Description	Material			
		Mark 0	Mark 2	Mark 6	Mark 9
1	Body	1.4462	1.4541	1.0565	1.0619
2	Sealing Support	1.4462	1.4541	1.0565	1.0619
3	Seat	1.4462	1.4541	1.4541	1.4541
4	Sealing ring	FPM	FPM	FPM	FPM
5	Piston	1.4462	1.4541	1.0565	1.0565
6	Bush	1.4462	1.4541	1.0565	1.0565
7	O - ring	FPM	FPM	FPM	FPM
8	Bush	1.4462	1.4541	1.0565	1.0565
9	Guide	1.0050	1.0050	1.0050	1.0050
10	Guide	1.0050	1.0050	1.0050	1.0050
12	Angle ring	1.0037	1.0037	1.0037	1.0037
14	O - ring	FPM	FPM	FPM	FPM
15	Clamping plate	1.0050	1.0050	1.0050	1.0050
17	Bush	1.4462	1.4541	1.4541	1.4541
18	V - ring	PTFE	PTFE	PTFE	PTFE
19	Seal clamp	1.0050	1.0050	1.0050	1.0050
22	Allen screw	8.8	8.8	8.8	8.8
23	Spindle	1.4462	1.4541	1.0503	1.0503
24	Actuating nut	2.0401	2.0401	2.0401	2.0401
25	Bearing	1.0565	1.0565	1.0565	1.0565
26	Tube body	1.0473	1.0473	1.0473	1.0473
27	Closing disc	1.4541	1.4541	1.4541	1.4541
28	Half ring	1.0050	1.0050	1.0050	1.0050
29	Handwheel	0.0625	0.0625	0.0625	0.0625
30	Fixing ring				
31	Lock	1.0050	1.0050	1.0050	1.0050
32	Fixing ring				
33	Stud bolt	1.7218	1.7218	1.7218	1.7218
34	Nut	1.1181	1.1181	1.1181	1.1181
35	O - ring	FPM	FPM	FPM	FPM
36	Stud bolt	1.7218	1.7218	1.7218	1.7218
37	Nut	1.1181	1.1181	1.1181	1.1181
42	Straining bush				
43	Adjusting pin	1.4462	1.4462	1.4462	1.4462
44	Cover				
47	Bolt	5.6	5.6	5.6	5.6
48	Spring washer				
50	Actuator	Chosen by order			
51	O - ring	FPM	FPM	FPM	FPM

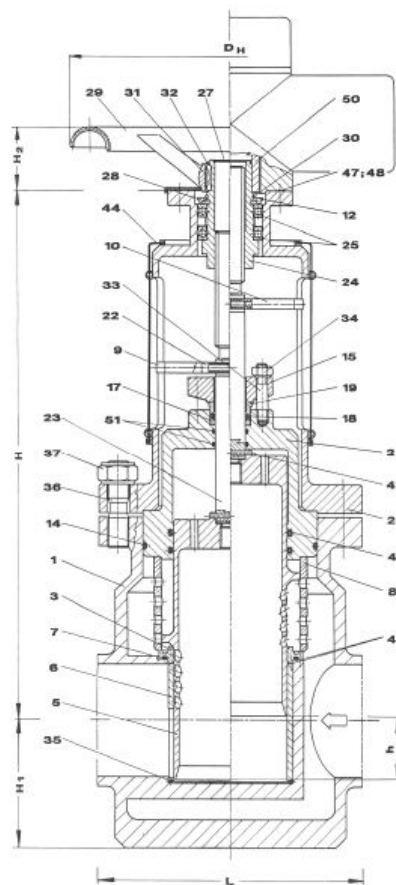

DN	PN	t (°C)
80 - 300	250	-50 - +200